gogo Kidz® Travelmate Model QRKIDZ Strap Installation & Operation

This guide will assist in the basic use of the new gogo Kidz Travelmate model# QRKIDZ. In this guide we will review the use of the Nylon QRKIDZ strap, adjusting the strap position and adjusting the strap length. Once the strap is installed in the correct position for your Travelmate compatible seat, it will not need to be removed from the Travelmate plate for use with the same car seat.

For attaching the gogo Kidz Travelmate to your compatible car seat please refer to the manual or our Attaching guides. The attaching guides can be found on our website, www.gogobabyz.com.

BASIC USE OF THE QRKIDZ STRAP


The QRKIDZ strap utilizes a ratchet buckle and ladder strap.



INSTALLING THE QRKIDZ STRAP TO TRAVELMATE PLATE

You will need 2 Phillips head screwdrivers

To Install: Use provided binding posts, spring washers and standard (flat) washers with 2 screwdrivers to attach strap & buckle to plate. Select desired hole for your car seat – and install the strap & buckle in the same hole on each side. The metal attaching bracket should be mounted on the back of the plate (the side with the logo on it).

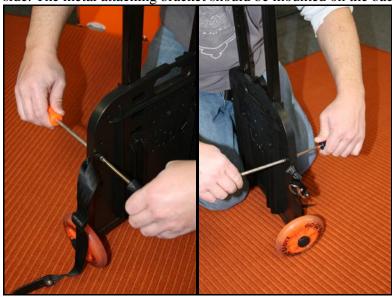

MAKE SURE TO INSTALL PARTS IN THIS ORDER: see pictures below labeled "back" & "front"

On the back of the plate, place metal bracket over desired hole, then insert spring washer on female post and insert through the metal bracket and plate hole. Hold in place with one screwdriver and insert the standard washer onto the screw and insert through the front of plate and tighten. *MAKE SURE TO TIGHTED THE POSTS UNTIL THE SPRING WASHER IS COMPLETELY FLAT*.



BACK FRONT

BASIC STRAP OPERATION/ATTACHING THE TRAVELMATE TO YOUR SEAT

To attach & tighten ladder strap: simply feed the strap into the lower portion of the buckle beneath the "Teeth" of the buckle as shown below. Then simply pull up on the silver ratchet buckle lever a few times to close the slack in the strap (tighten the strap).




To release the strap from the buckle: simply pull the Black Lever on the buckle in the opposite direction of the silver buckle teeth and pull the strap in the opposite direction and remove strap from buckle.



ADJUSTING THE POSITION OF THE STRAP ON THE GOGO KIDZ TRAVELMATE PLATE:

Depending on your seat type, the strap may need to be raised or lowered from its original position on the plate. Go-Go Babyz has assembled the strap in the most common position for car seats.

The QRKIDZ strap is comprised of two parts, a ratchet buckle and a ladder strap. Both of these components are attached to the Travelmate in one of the six holes found running down each side of the gogo Kidz Travelmate Plate. The Components are secured with binding posts, which will need to be unscrewed using a Phillips head tool. Once the binding posts have been removed, simply select the hole which best mimics the same path as your car seat belt would be when installed in the car. You want the strap to be as level as possible to obtain the most secure attachment. Once the correct hole is found, simply reinsert the binding post through the attachment component (either the ratchet buckle or ladder strap) and secure from both sides of the plate. Make sure that you have installed the components in the same hole position on each side of the plate, IE 3 hole on each side.

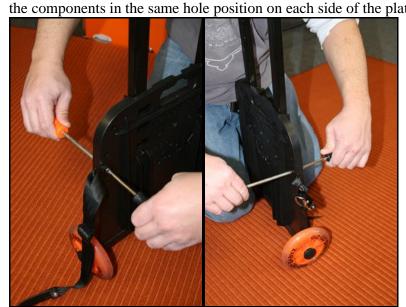

ADJUSTING THE LENGTH OF THE ORKIDZ STRAP:

To adjust the strap length, simply slide the adjusting clip in the desired direction to establish the desired tension.



IF YOU NEED MORE ASSISTANCE:

Visit our Travelmate support page on our website:

http://www.gogobabyz.com/customerservice-q10030-gogo_Kidz_Travelmate_support.aspx

View videos of this manual:

http://www.youtube.com/user/GoGoBabyzCorporation#p/u/9/pF2dShnztj4http://www.youtube.com/user/GoGoBabyzCorporation#p/u/8/x4yU0R8SxI4

Contact us:

info@gogobabyz.com 888.686.2552